# EcoSheffield Cycle Stand
# Galvanised, Galvanised & Colour or Stainless

The tubular cycle stand, a familiar sight throughout the UK, allows the frame of the bicycle to be secured by the users own security lock.

Suitable for securing two bicycles. The EcoSheffield is a reduced footprint variant of the ever popular Sheffield cycle stand.

The practical and durable nature of the EcoSheffield cycle stand ensures it has been consistently recommended by cycling groups since it's introduction in the 2000's.

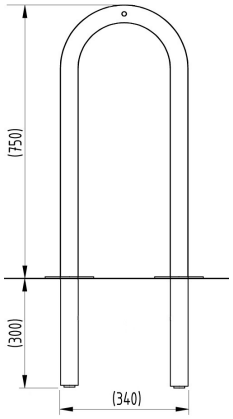


| Part Number | Description | Weight (kg) |
|---|---|---|
| 138 515 165 | Galvanised - Concrete In | 8kg |
| 138 515 160 | Galvanised - Bolt Down | 7kg |
| 138 515 167 | Galvanised & Black - Concrete In | 8kg |
| 138 515 162 | Galvanised & Black - Bolt Down | 7kg |
| 138 515 166 | Galvanised & Colour - Concrete In | 8kg |
| 138 515 164 | Galvanised & Colour - Bolt Down | 7kg |
| 138 515 175 | Stainless Steel Grade 304 - Concrete In | 8kg |
| 138 515 170 | Stainless Steel Grade 304 - Bolt Down | 7kg |
| 138 515 174 | Stainless Steel Grade 316 - Concrete In | 8kg |
| 138 515 172 | Stainless Steel Grade 316 - Bolt Down | 7kg |

## Product details

- 48mm diameter tube
- 750mm x 340mm (height x length)
- Concrete in 300mm (below ground)
- Round flange plate – 133mm x 5mm
- Each stand requires 6 bolts (bolt down)

## Installation & use

Bolt down to a suitable concrete surface.
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
Products are guaranteed for 12 months (if installed and used correctly).

British Made

bsi ISO 9001 Quality Management Systems CERTIFIED | ISO 14001 Environmental Management CERTIFIED | ISO 45001 Occupational Health and Safety Management CERTIFIED